



# Swing Check Valve

PN 40      DN 50 - DN 400

Flanges PN 40 or PN 25 or PN 16



Fig. 280-580

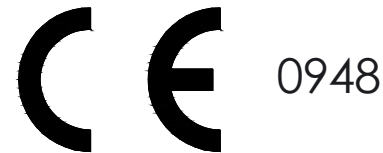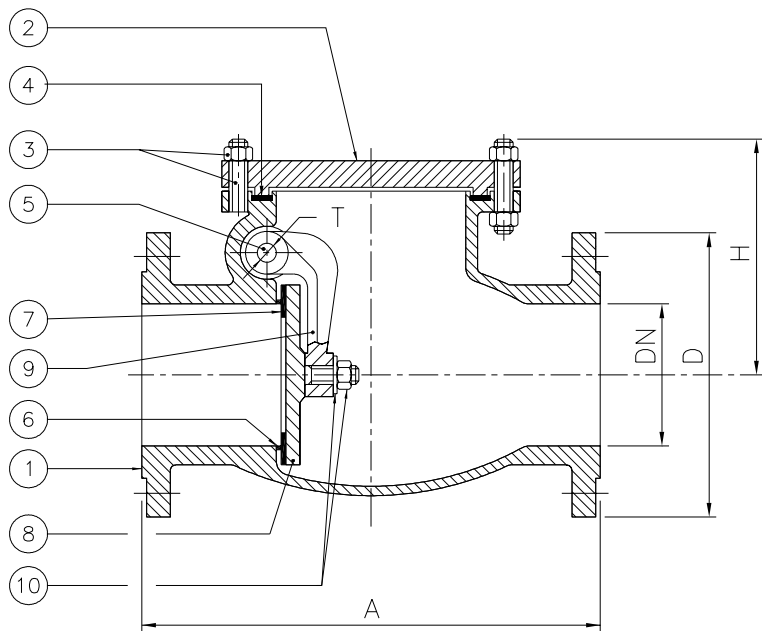

## Standard features:

- Design                    EN 12516  
                                  EN 14341
- Face to face            EN 558 series 1  
                                  DIN 3202 F1
- Flanges                    EN 1092-1/21/B1
- Materials                EN 10213  
                                  EN 10269  
                                  EN 10088
- Bolts and nuts        EN 1515-1
- Welding overlay      AD-M HP 0
- Testing                    EN 12266
- Marking                 EN 19
- Certificates            EN 10204

## Optional versions:

- AD 2000 – A4
- TRD 110
- DIN 3230 Part 4
- DIN 3230 Part 5
- DIN 3230 Part 6
- TRbF 131
- TRbF 301 or 302
- ATEX
- TA-Luft
- With flanges PN 10
- With flanges form A, B2, C, D, E, F, G, H
- With butt welding ends (EN 12627 / EN 12982)
- With special devices (see page 52)